Roof Report

Prepared by Roofr

517 Cornwall Court, Carmel, IN 46032

5233 sqft

15 facets

Predominant pitch 8/12

Nearmap Apr 1, 2025

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Diagram

517 Cornwall Court, Carmel, IN 46032

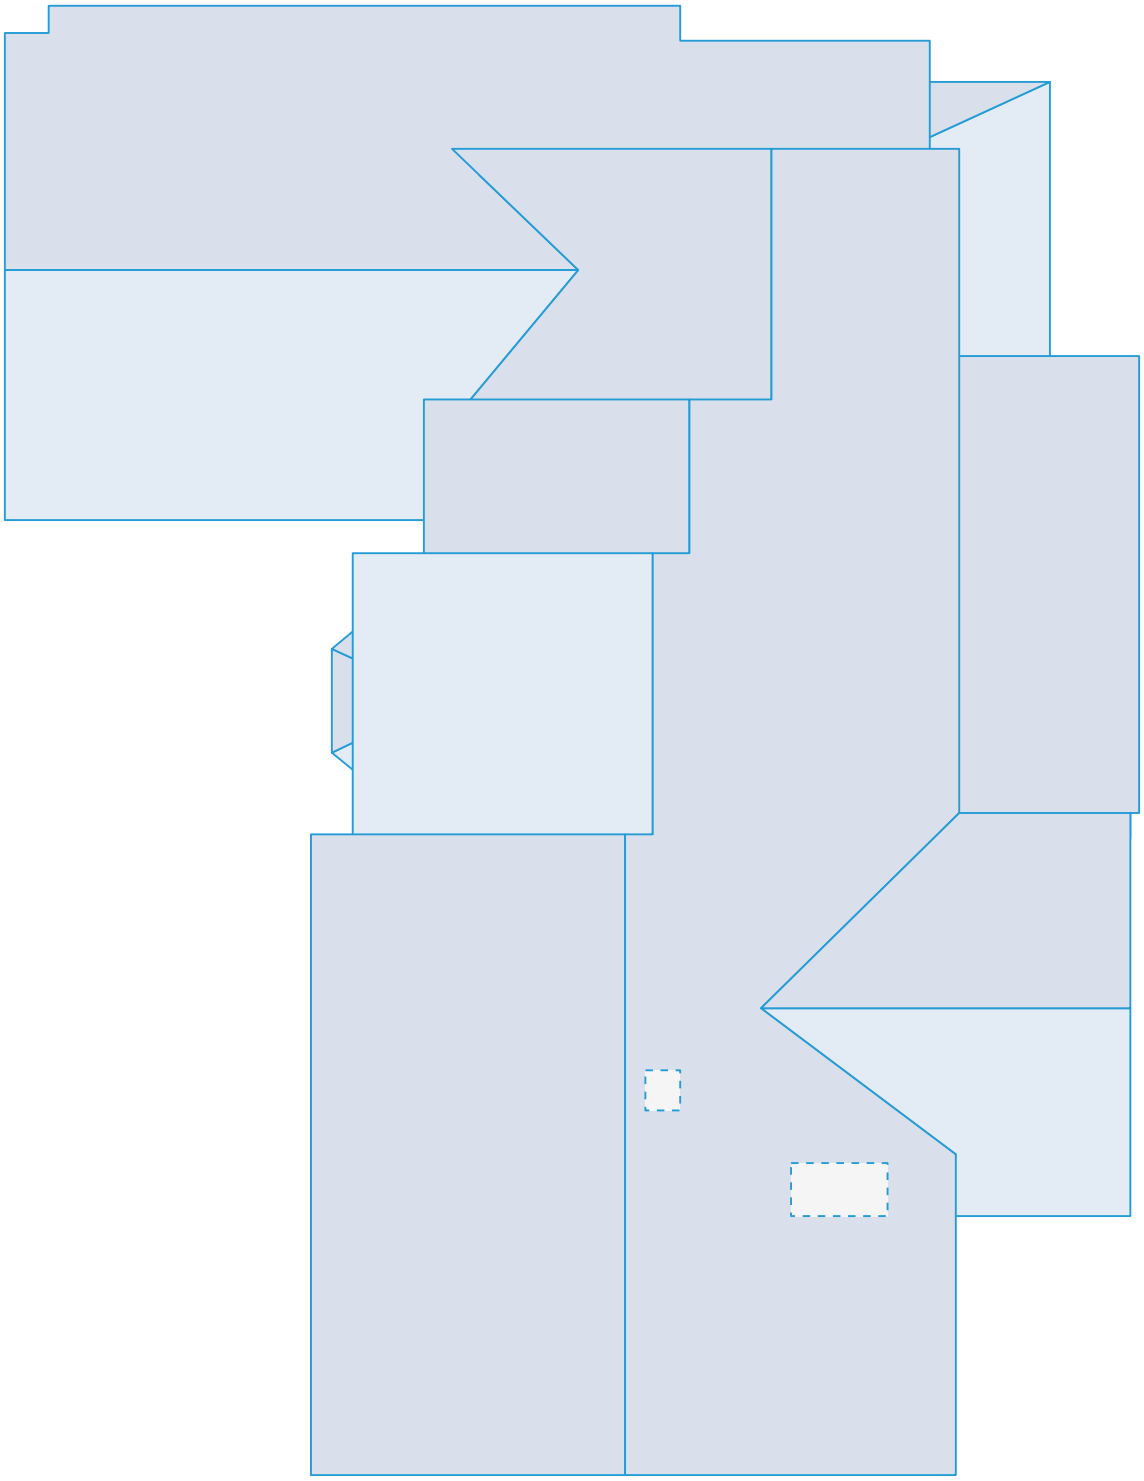

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Length measurement report

517 Cornwall Court, Carmel, IN 46032

- Eaves: 286ft 8in
- Ridges: 135ft 2in
- Step flashing: 121ft 4in
- Unspecified: 117ft 1in
- Valleys: 57ft 10in
- Rakes: 238ft 11in
- Transitions: 0ft 0in
- Hips: 16ft 11in
- Wall flashing: 82ft 10in
- Parapet wall: 0ft 0in

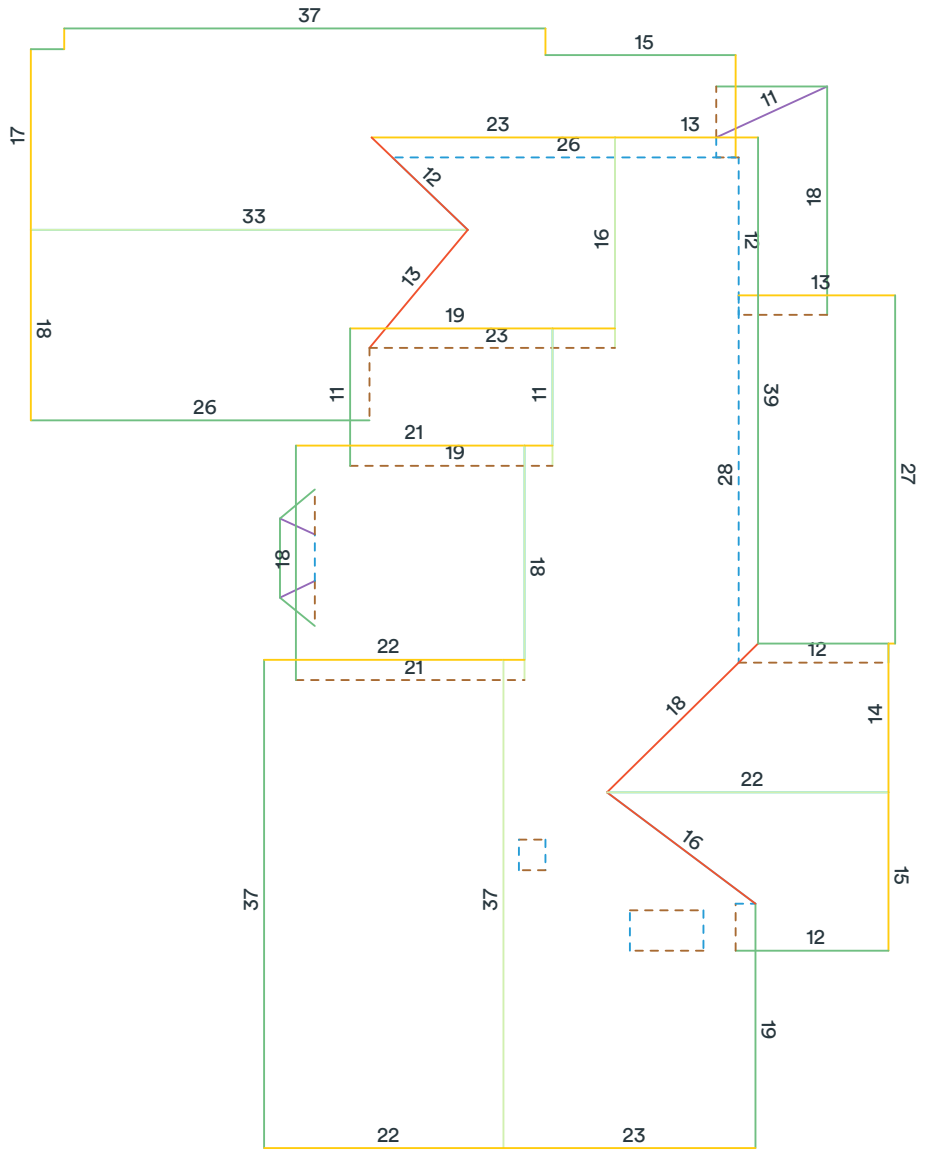

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Area measurement report

517 Cornwall Court, Carmel, IN 46032

Total roof area: 5233 sqft
Pitched roof area: 5233 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 8/12
Predominant pitch area: 4745 sqft
Unspecified pitch area: 0 sqft

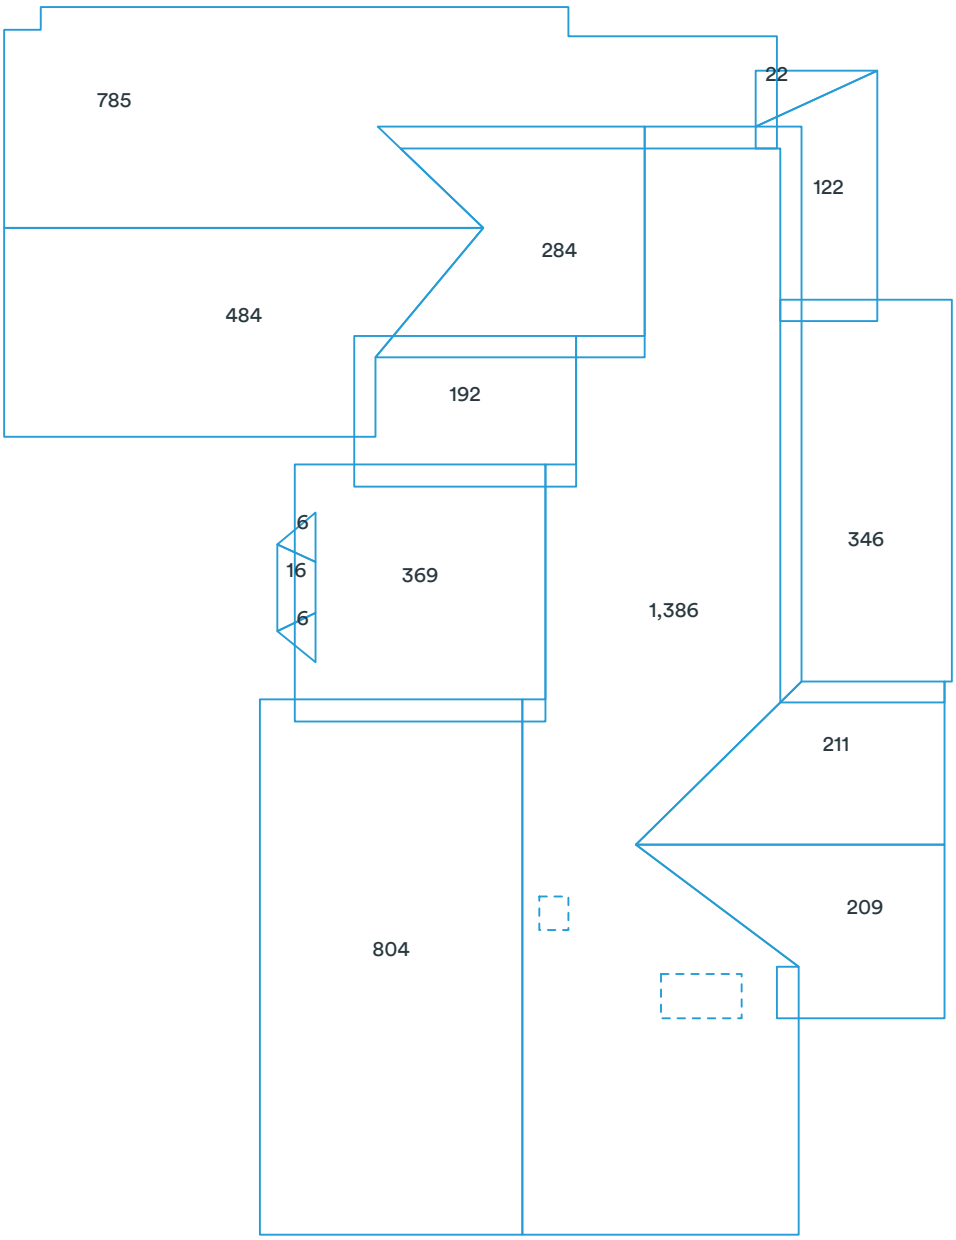

Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Pitch & direction measurement report

517 Cornwall Court, Carmel, IN 46032

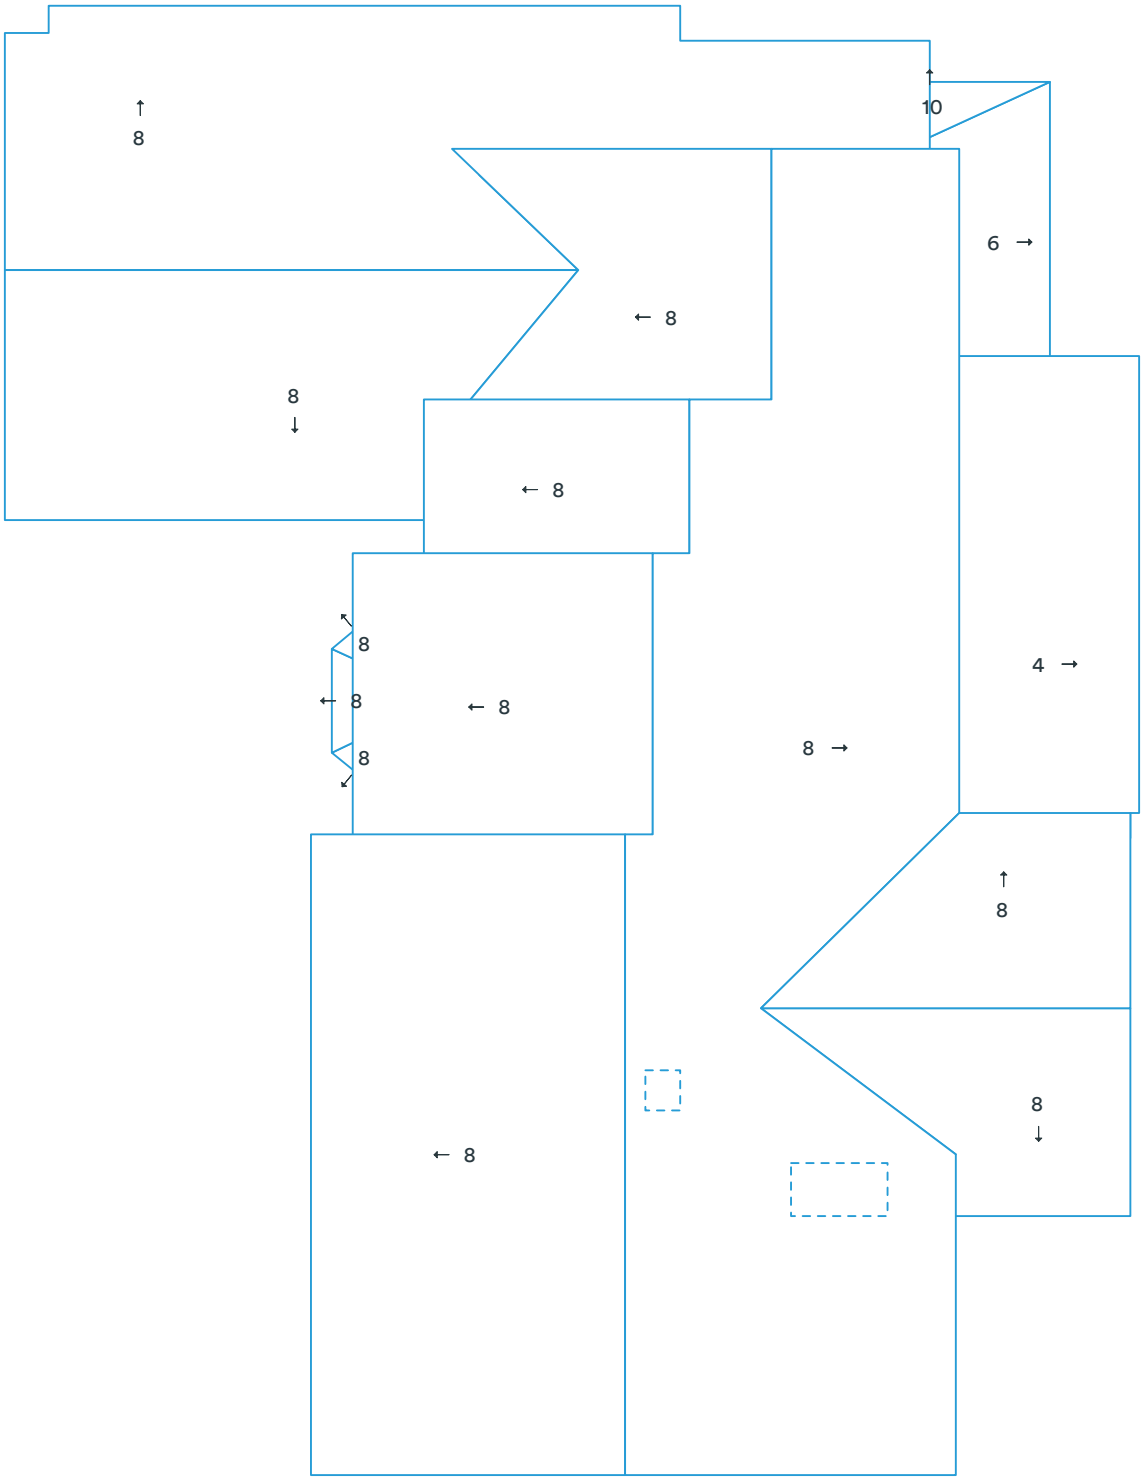



Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Report summary

517 Cornwall Court, Carmel, IN 46032

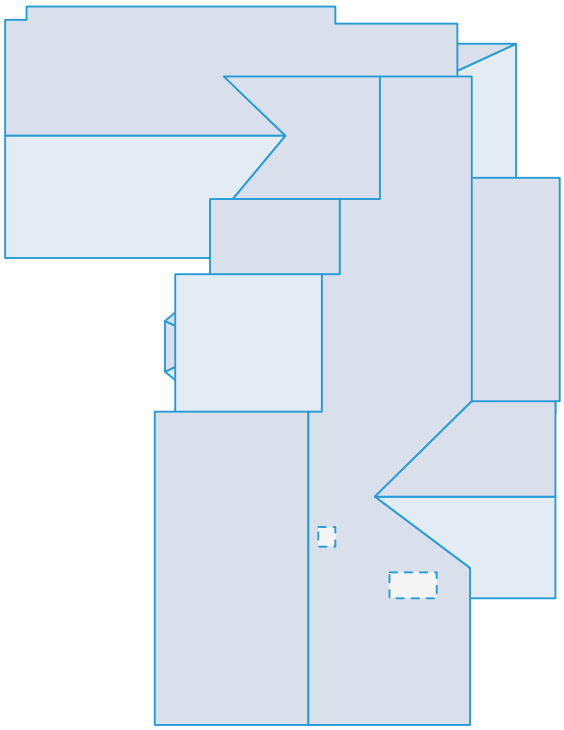

Measurements	
Total roof area	5233 sqft
Total pitched area	5233 sqft
Total flat area	0 sqft
Total roof facets	15 facets
Predominant pitch	8/12
Total eaves	286ft 8in
Total valleys	57ft 10in
Total hips	16ft 11in
Total ridges	135ft 2in
Total rakes	238ft 11in
Total wall flashing	82ft 10in
Total step flashing	121ft 4in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	117ft 1in
Hips + ridges	152ft 1in
Eaves + rakes	525ft 6in

Pitch	4/12	6/12	8/12	10/12
Area (sqft)	346	122	4,745	22
Squares	3.5	1.3	47.5	0.3

			Recommended				
Waste %	0%	10%	11%	12%	15%	17%	20%
Area (sqft)	5,233	5,757	5,809	5,861	6,018	6,123	6,280
Squares	52.4	57.6	58.1	58.7	60.2	61.3	62.8

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.

Material calculations

517 Cornwall Court, Carmel, IN 46032

Product	Unit	Waste (0%)	Waste (10%)	Waste (11%)	Waste (15%)
Shingle (total sqft)		5,233 sqft	5,757 sqft	5,809 sqft	6,018 sqft
IKO - Cambridge	bundle	158	173	175	181
CertainTeed - Landmark	bundle	160	176	178	184
GAF - Timberline	bundle	160	176	178	184
Owens Corning - Duration	bundle	160	176	178	184
Atlas - Pristine	bundle	159	175	177	183
Starter (eaves + rakes)		526 ft	579 ft	584 ft	605 ft
IKO - Leading Edge Plus	bundle	5	5	5	6
CertainTeed - SwiftStart	bundle	5	5	6	6
GAF - Pro-Start	bundle	5	5	5	6
Owens Corning - Starter Strip	bundle	6	6	6	6
Atlas - Pro-Cut	bundle	4	5	5	5
Ice and Water (eaves + valleys + flashings)		549 ft	604 ft	610 ft	631 ft
IKO - StormShield	roll	9	10	10	10
CertainTeed - WinterGuard	roll	9	10	10	10
GAF - WeatherWatch	roll	9	10	10	10
Owens Corning - WeatherLock	roll	8	9	9	9
Atlas - Weathermaster	roll	9	10	10	10
Synthetic (total sqft; no laps)		5,233 sqft	5,757 sqft	5,809 sqft	6,018 sqft
IKO - Stormtite	roll	6	6	6	7
CertainTeed - RoofRunner	roll	6	6	6	7
GAF - Deck-Armor	roll	6	6	6	7
Owens Corning - RhinoRoof	roll	6	6	6	7
Atlas - Summit	roll	6	6	6	7
Capping (hips + ridges)		153 ft	168 ft	169 ft	175 ft
IKO - Hip and Ridge	bundle	4	5	5	5
CertainTeed - Shadow Ridge	bundle	6	6	6	6
GAF - Seal-A-Ridge	bundle	7	7	7	7
Owens Corning - DecoRidge	bundle	8	9	9	9
Atlas - Pro-Cut H&R	bundle	5	6	6	6
Other					
8' Valley (no laps)	sheet	8	8	9	9
10' Drip Edge (eaves + rakes; no laps)	sheet	53	58	59	61

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2025 Roofr.com | All rights reserved.